

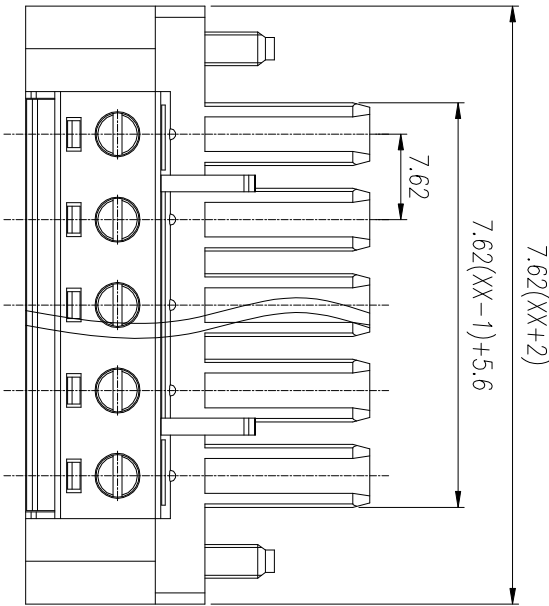


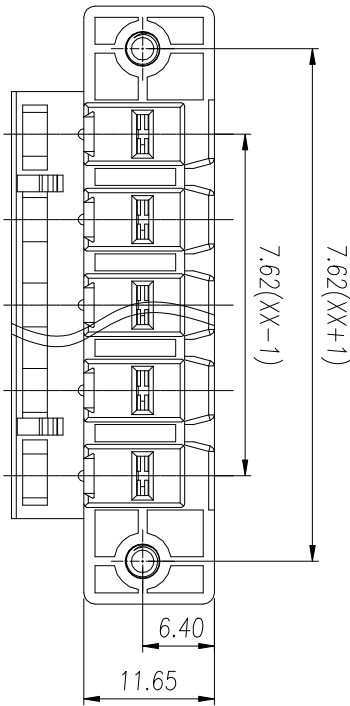

慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD

REVISION RECORD			
REV.	DESCRIPTION	ECN No.	APPROVED

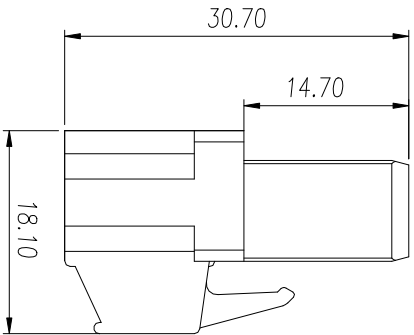

UL/CUL 技术参数				UL/CUL Technical Data				UL/CUL 技术参数																																							
等级	Use Group	B	C	D	等级	Use Group	B	C	D	等级	Use Group	B	C	D																																	
额定电压	Rated Voltage	[V]	300	-	300	额定电压	Rated Voltage	[V]	300	-	300	额定电压	Rated Voltage	[V]	300	-	300																														
额定电流	Rated Current	[A]	30	-	10	额定电流	Rated Current	[A]	30	-	10	额定电流	Rated Current	[A]	30	-	10																														
接线范围	Wire Range	28-10				接线范围	Wire Range	28-10				接线范围	Wire Range	28-10																																	
单/多芯线	Solid/Stranded	[AWG]				单/多芯线	Solid/Stranded	[AWG]				单/多芯线	Solid/Stranded	[AWG]																																	
耐电压	Withstanding Voltage	1600V/1Min				耐电压	Withstanding Voltage	1600V/1Min				耐电压	Withstanding Voltage	1600V/1Min																																	
IEC 技术参数								IEC 技术参数								IEC 技术参数																															
IEC Technical Data								IEC Technical Data								IEC Technical Data																															
过电压类别	Overvoltage Category	III	III	II	过电压类别	Overvoltage Category	III	III	II	过电压类别	Overvoltage Category	III	III	II																																	
污染等级	Contamination Class	3	2	2	污染等级	Contamination Class	3	2	2	污染等级	Contamination Class	3	2	2																																	
额定电压	Rated Voltage	[V]	400	630	1000	额定电压	Rated Voltage	[V]	400	630	1000	额定电压	Rated Voltage	[V]	400	630	1000																														
额定电流	Rated Current	[A]	20	20	20	额定电流	Rated Current	[A]	20	20	20	额定电流	Rated Current	[A]	20	20	20																														
额定冲击电压	Impulse withstand voltage	[kV]	6.0	6.0	6.0	额定冲击电压	Impulse withstand voltage	[kV]	6.0	6.0	6.0	额定冲击电压	Impulse withstand voltage	[kV]	6.0	6.0	6.0																														
导线截面积	Conductor cross section	0.5-4.0				导线截面积	Conductor cross section	0.5-4.0				导线截面积	Conductor cross section	0.5-4.0																																	
硬质/柔性导线	Solid/flexible	[mm²]				硬质/柔性导线	Solid/flexible	[mm²]				硬质/柔性导线	Solid/flexible	[mm²]																																	
材料								材料								材料																															
绝缘材料	Insulation Material	PA66				绝缘材料	Insulation Material	PA66				绝缘材料	Insulation Material	PA66																																	
阻燃等级	Inflammability	UL94V-0				阻燃等级	Inflammability	UL94V-0				阻燃等级	Inflammability	UL94V-0																																	
导体材料	Conductor Material	铜合金 Copper alloy				导体材料	Conductor Material	铜合金 Copper alloy				导体材料	Conductor Material	铜合金 Copper alloy																																	
导体表面镀层	Conductive Coating	镀锡 Sn Plated				导体表面镀层	Conductive Coating	镀锡 Sn Plated				导体表面镀层	Conductive Coating	镀锡 Sn Plated																																	
一般参数																一般参数																一般参数															
Other Data																Other Data																Other Data															
间距	Pitch /级数	Poles	[mm] / [P]		间距	Pitch /级数	Poles	[mm] / [P]		间距	Pitch /级数	Poles	[mm] / [P]																																		
7.62	102-24	8-9			7.62	102-24	8-9			7.62	102-24	8-9																																			
剥线长度	Stripping Length	[mm]		剥线长度	Stripping Length	[mm]		剥线长度	Stripping Length	[mm]		剥线长度	Stripping Length	[mm]																																	
8-9				8-9				8-9				8-9																																			
螺丝	Screw/扭矩	Torque[Max]	[N.m]		螺丝	Screw/扭矩	Torque[Max]	[N.m]		螺丝	Screw/扭矩	Torque[Max]	[N.m]																																		
M30.5				M30.5				M30.5				M30.5																																			
工作温度	Operating temperature	[°C]		工作温度	Operating temperature	[°C]		工作温度	Operating temperature	[°C]		工作温度	Operating temperature	[°C]																																	
40-105				40-105				40-105				40-105																																			
焊接温度	Soldering temperature	-		焊接温度	Soldering temperature	-		焊接温度	Soldering temperature	-		焊接温度	Soldering temperature	-																																	
引针尺寸	Pin Dimensions	[mm]		引针尺寸	Pin Dimensions	[mm]		引针尺寸	Pin Dimensions	[mm]		引针尺寸	Pin Dimensions	[mm]																																	
-				-				-				-																																			
PCB板孔径	PCB Hole Diameter	[mm]		PCB板孔径	PCB Hole Diameter	[mm]		PCB板孔径	PCB Hole Diameter	[mm]		PCB板孔径	PCB Hole Diameter	[mm]																																	
-				-				-				-																																			

linear dimension(Tolerances Standard GB/T 14486-2008)											
	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to 10	over 10 to 100	over 100 to 10	over 10 to 100	over 100 to 10	over 100 to 10
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60	0.60

单位 / UNITS	mm	尺寸 / SIZE	A4	比例 / SCALE	版本 / REV	V0
名称 / TITLE	WJ3EDGKM-7.62-XXP-1YY-00A	第三视图/THIRD ANGLE PROJECTION				



慈溪市万捷电子有限公司
CIXI WANJIE ELECTRONIC CO., LTD